

Lighting

PHILIPS

TUV T5

TUV 64T5 HO 4P SE UNP/32

TUV T5 lamps are single- or double-ended UVC (germicidal) lamps used in professional water and air disinfection units. The small 16 mm diameter of the lamp allows for a small system design and design flexibility. TUV T5 lamps offer constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- DANGER: Risk Group 3 Ultra Violet product. These lamps emit high-power UV radiation that can cause severe injury to skin and eyes. Avoid eye and skin exposure to unshielded product. Use only in an enclosed environment which shields users from the radiation.


Product data

General Information		Voltage (Nom)	175 V
Cap base	4PINSSINGLEENDED [4 Pins Single Ended]		
Main application	Disinfection	Mechanical and Housing	
Useful life (nom.)	9000 h	Cap-base information	4 Pins Single Ended
System description	High Output (HO)	Bulb shape	T16
Light Technical		Approval and Application	
Colour Code	TUV	Mercury (Hg) content (nom.)	5.5 mg
Colour Designation	- [Not Specified]		
Depreciation at useful lifetime	15 %	UV	
		UV-C Radiation	45 W
Operating and Electrical			
Power (Rated) (Nom)	140 W	Product Data	
Lamp current (nom.)	0.8 A	Full product code	871150026131199

Order product name	TUV 64T5 HO 4P SE UNP/32		
EAN/UPC – product	8711500261311		
Order code	927971104099		
SAP numerator – quantity per pack	1		
Numerator – packs per outer box	32		

SAP material	927971104099
SAP net weight (piece)	156.000 g


Dimensional drawing




Product	D (max)	C (max)	A (max)
TUV 64T5 HO 4P SE UNP/32	19.3 mm	1564.5 mm	1555.2 mm

TUV 64T5 HO 4P SE

Photometric data



XDPB_XUTUV-Spectral power distribution B/W

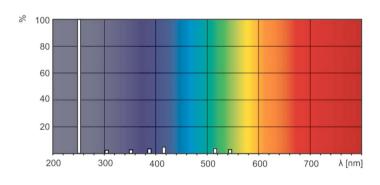

XDPO_XUTUV-Spectral power distribution Colour



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2021, June 8 - data subject to change